



| Version | MARK | MODIFY | DATE |
|---------|------|--------|------------|
| 2.0 | A | FPC | 2009.08.07 |
| | | | |
| | | | |

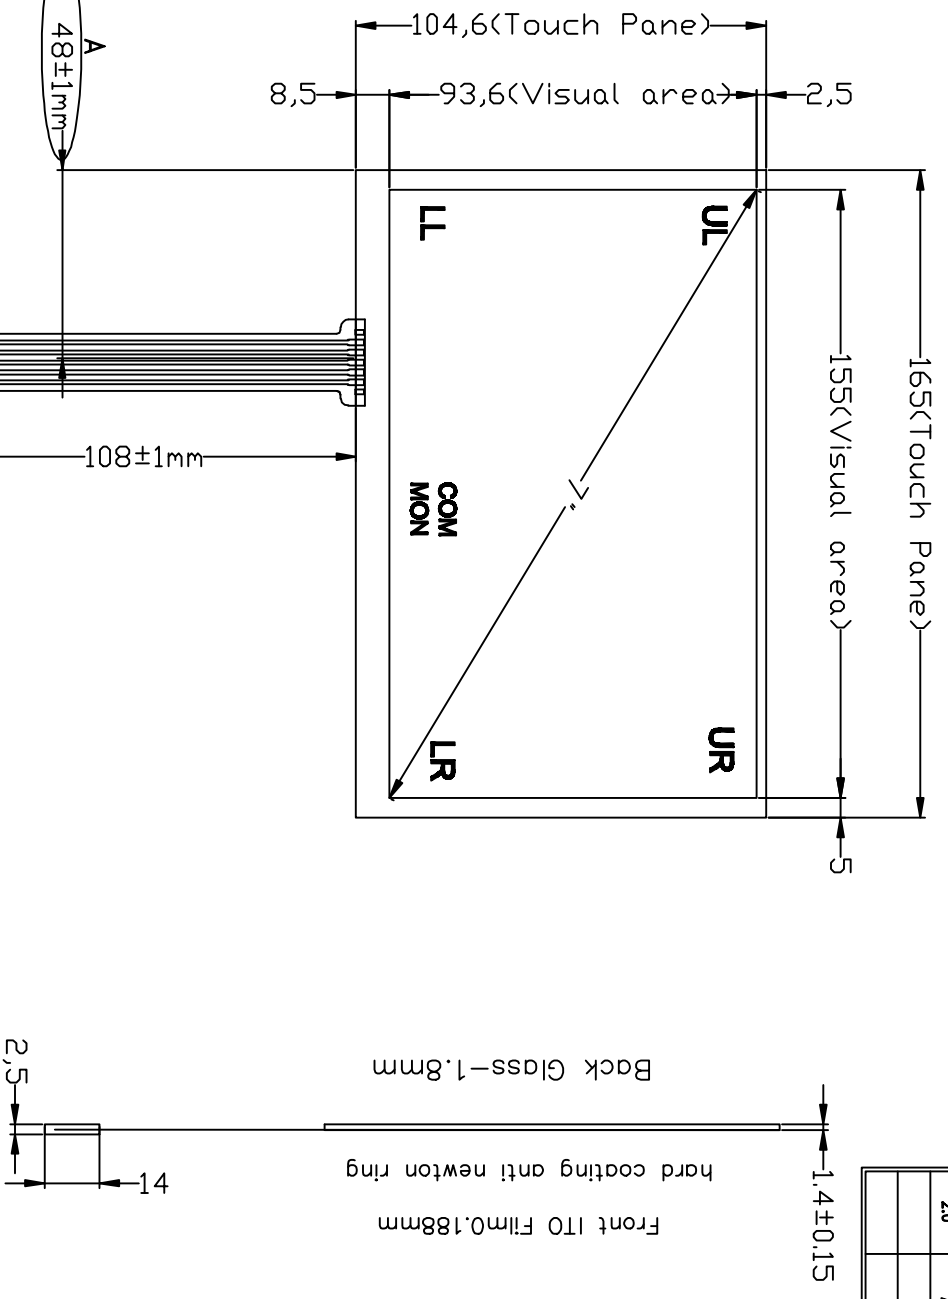

- Instruction:
- Type: Film to Glass
 - Operating Voltage: $\leq 10V$
 - Response Time: $\leq 10ms$
 - Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$
 - Operation Temperature/Humidity: $-10^{\circ}C \sim +60^{\circ}C / 20\% \sim 95\%$
 - Hitting Life: $> 10,000,000$ Times, 250gf Force;
 - writing Life: $> 1,000,000$ Times 250gf Force;
 - Connect Material: FPC+PIN

- Film Thickness: 0.188mm
- Glass Thickness: 1.1mm
- Light transmission: $\geq 78\%$
- Force: 100g or more
- Linearity: $\leq 5\%$
- Insulation: $\geq 20M\Omega$
- Resistance: $50\Omega < PIN1, PIN2 < 280\Omega$
 $50\Omega < PIN3, PIN4 < 280\Omega$
 $50\Omega < PIN5, PIN6 < 280\Omega$
 $50\Omega < PIN1, PIN2 < 280\Omega$
- Surface Hardness $\geq 3H$ (pencil)

Touch Panel-TouchKit

REVISIONS

| SCALE | 1:1 | MATERIAL | F/G | Version | 2.0 |
|---------|-----|-----------|-------------|---------|--------|
| UNIT | MM | TOLERANCE | $\pm 0.3mm$ | NO. | 1 of 1 |
| DESIGN | | DATE | 20090807 | | |
| CHECK | | DATE | 20090807 | | |
| RELEASE | | DATE | 20090807 | | |

TouchKit-0701-W5R