

G

F

E


由 Autodesk 教育版产品制作

C

B

A

5

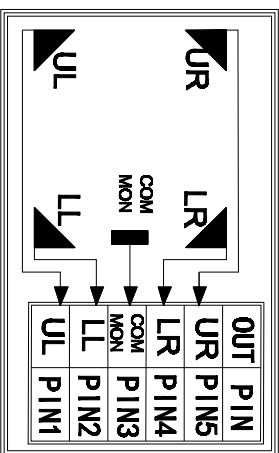

4

Notes:

1. Type: Film to Glass
2. Operating Voltage:  $\leq 10V$
3. Operation Temperature:  $-20^{\circ}C \sim 65^{\circ}C$   
Storage Temperature:  $-30^{\circ}C \sim 70^{\circ}C$
4. Life Time: 1,000,000 times
5. Connect Material: FPC
6. Response Time:  $\leq 10ms$
7. Linearity:  $\leq 1.5\%$
8. Transmittance:  $\geq 75\%$
9. Surface Hardness:  $\geq 3H$  (pencil)
10. Operation force:  $60g \sim 150g$

3

3

2

2


1

1

Front ITO Film-0.188mm  
Back ITO Glass-1.8mm

Thick:  $2.3 \pm 0.15$

3.0



429, 37  $\pm 0.3$   
VA, 412, 97  
AA, 409, 37

8, 2  
10

469, 75 [18.5"]


AA, 230, 4  
VA, 234  
253, 6  $\pm 0.3$

UL

LL

UR

COM  
MON



PITCH 2.54

12, 7

214, 69

11, 6

11. Resistance:  $50\Omega < PIN1, PIN2 < 250\Omega$

$50\Omega < PIN2, PIN4 < 250\Omega$

$50\Omega < PIN4, PIN5 < 250\Omega$

$50\Omega < PIN5, PIN1 < 250\Omega$

TouchKit

TouchKit-1850-W5R-A

(UNLESS OTHERWISE STATED)  
DIMENALS ANGLES:  $\pm 0.5\%$

1000" X 500MM	$\leq 200MM$	$\pm 20MM$
700" X 500MM	$\leq 120MM$	$\pm 10MM$
800" X 500MM	$\leq 80MM$	$\pm 5MM$
400" X 500MM	$\leq 40MM$	$\pm 2MM$
120" X 500MM	$\leq 20MM$	$\pm 1MM$
50" X 500MM	$\leq 10MM$	$\pm 0.5MM$

Model No.:	1850-W5R-A	Size:	18.5"	Ratio:	16:9
Structure:	GF	Unit:	mm	Scale:	1:1
Design:	张#	Date:	2015.5	Page:	1/1
Check:	张#	Date:	2015.5	Version:	A0
Reviewed:	张#	Date:	2015.5		