


Thick: 2.3±0.15
 Back Glass: 1.8mm
 Front: ITO Film: 0.188mm
 14
 3.0

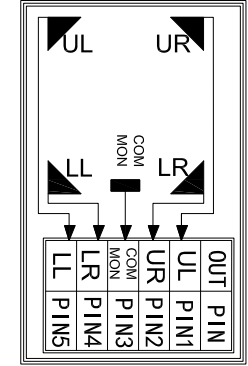

- Notes:
- 1.Type:Film to Glass
 - 2.Operating Voltage:≤10v
 - 3.Operation Temperature:-20°C~65°C
Storage Temperature:-30°C~70°C
 - 4.Life Time:1,000,000 times
 - 5.Connect Material:FPC
 - 6.Response Time:≤10ms
 - 7.Linearity:≤1.5%
 - 8.Transmittance:≥75%
 - 9.Surface Hardness≥3H(pencil)
 - 10.Operation force:60g~150g

- 11.Insulation:≥20MΩ
- 12.Resistance:50Ω < PIN1, PIN2 < 250Ω
50Ω < PIN2, PIN4 < 250Ω
50Ω < PIN4, PIN5 < 250Ω
50Ω < PIN5, PIN1 < 250Ω

TOLERANCES
 (UNLESS OTHERWISE STATED)
 DECIMALS ANGLES ±0.5%
 >2000MM ±2.00MM
 1600< X ≤2000MM ±1.20MM
 1200< X ≤1600MM ±0.80MM
 800< X ≤1200MM ±0.50MM
 400< X ≤800MM ±0.40MM
 120< X ≤400MM ±0.30MM
 30< X ≤120MM ±0.20MM
 <30MM ±0.10MM

TouchKit		TouchKit-2150-W5R-A			
Model No.:	2150-W5R-A	Size	21.5"	Ratio	16:9
Structure	G+F	Unit	mm	Scale	1:1
Design	LOIS	Date	2015.8.5	Page	1/1
Check	ATAN	Date	2015.8.5	Version	A0
Release	QiaQia	Date	2015.8.5		

