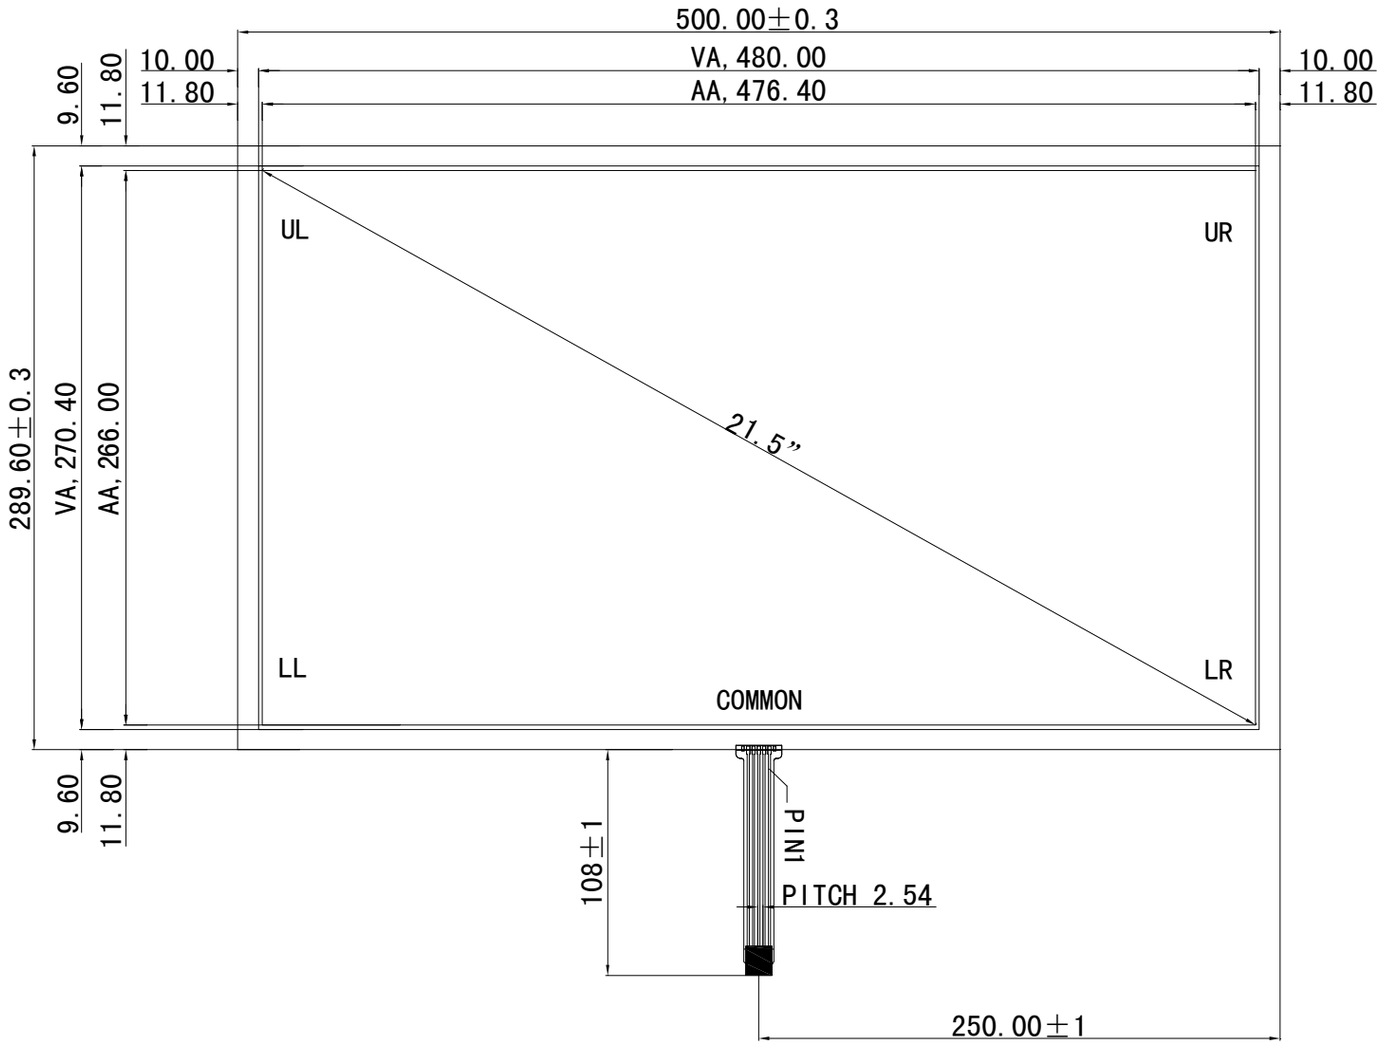

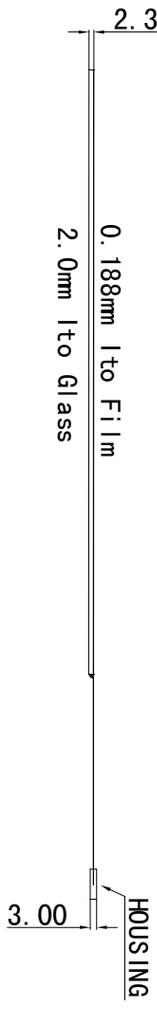

PIN	OUT
1	UR
2	LR
3	COMMON
4	LL
5	UL

Notes:

1. Type:Film to Glass
2. Operating Voltage:≤10V
3. Operation Temperature:-10℃～60℃ Storage Temperature:-20℃～70℃
4. Life Time: ＞10, 000, 000 times
5. Connect Material:FPC
6. Response Time:≤10ms
7. Linearity:≤5%
8. Transmittance:≥85%
9. Surface Hardness≥3H(pencil)
10. Operation force: 60g～150g

TouchKit-2150-W5R

MODEL NO.	2150-W5R	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:	09/11/12	SCALE:	1:1
VERSION:	1.0	REV:	