


Thickness: 2.3 ± 0.15

Front ITO Film 0.188mm
hard coating anti newton ring
Back Glass-1.8mm

- Instruction:
- 1.Type: Film to Glass
 - 2.Operating Voltage: $\leq 10V$
 - 3.Response Time: $\leq 10ms$
 - 4.Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$
 - 5.Operation Temperature/Humidity : $-10^{\circ}C \sim +60^{\circ}C / 20\% \sim 95\%$
 - 6.Hitting Life: $> 10,000,000$ Times , 250gf Force;
 - 7.writing Life: $> 1,000,000$ Times 250gf Force;
 - 8.Connect Material: FPC+PIN

- 9.Film Thickness: 0.188mm
- 10.Glass Thickness: 1.8mm
- 11.Light transmission: $\geq 73\%$
- 12.Force: 100g or more
- 13.Linearity: $\leq 5\%$
- 14.Insulation: $\geq 20M\Omega$
- 15.Resistance: $50\Omega < P_{UL}, P_{UR}, P_{LL}, P_{LR} < 250\Omega$
 $50\Omega < P_{PIN1}, P_{PIN2} < 250\Omega$
 $50\Omega < P_{PIN3}, P_{PIN4} < 250\Omega$
 $50\Omega < P_{PIN5}, P_{PIN6} < 250\Omega$
- 16.Surface Hardness $\geq 3H$ (pencil)

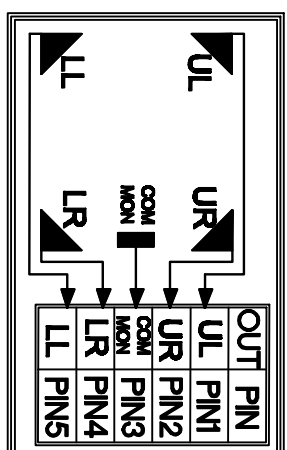

TouchKit-2210-W5R-A

REVISIONS

SCALE	UNIT	MATERIAL	F/Q	Version
1:1	mm			1.0
DESIGN	Jaka	DATE	20090506	NO: 1 of 1
CHECK	pefer	DATE	20090506	
RELEASE	J	DATE	20090506	

TouchKit